



EXCLUSIVE

Inoxsystem®

Stainless Steel - Think about your future



TOTAL HYGIENIC

New Drainage Systems

Inoxsystem® Total Hygienic stainless steel drainage systems have been developed to respond efficiently and effectively to current international health and safety regulations, ensuring high hygienic performance and safe work environment.

Durable and robust products rated for heavy weight loads, their technical features prevent bacteria growth making them the ideal solution in those environments where hygiene is essential.

Inoxsystem® Total Hygienic drainage channels are provided with rounded internal corners, like all the other products in this catalogue, but also with a removable odor trap + filter basket kit that allows a fast and thorough cleaning of the gully.

Inoxsystem® Total Hygienic gratings are in turn defined as "antibacterial": indeed, the lack of banding bars on the grating edges avoids the accumulation of dirt even if the grating is not removed, without compromising the hygiene of the environment.

Hygiene but also safety. Thanks to their notched surface, Total Hygienic Multi-Slot and Double Slot gratings meet anti-slip standard requirements reducing the risk of accidental slipping, while the very thick top plate of the floor drains prevent accidental removal of the inner cover.

Index

Page

<i>Inoxsystem® Total Hygienic floor drains with square top plate</i>	44
<i>Inoxsystem® Total Hygienic gullies with grating</i>	46
<i>Inoxsystem® Total Hygienic channels</i>	48
<i>Inoxsystem® Total Hygienic gratings</i>	50
<i>Inoxsystem® Total Hygienic floor drains with one floor drain-channel connection</i>	52
<i>Inoxsystem® Total Hygienic gullies with grating and one gully-channel connection</i>	54
<i>Inoxsystem® Total Hygienic lines</i>	56




Stainless steel is
100%
Recyclable



Antibacterial
Easy
to clean

Removable odor trap pipe & filter basket kit

Inoxsystem[®] code "KE"

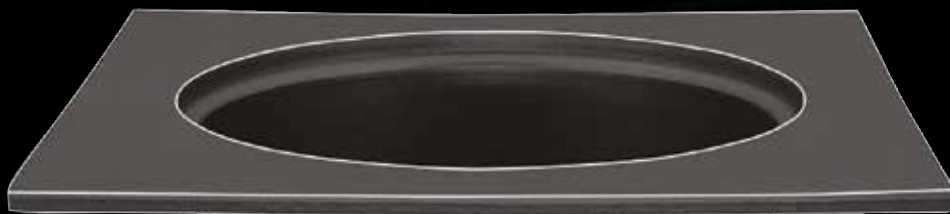

By removing both filter basket and internal pipe the wastewater flows and the floor drain should be thoroughly cleaned.


It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.



Provided with
removable
odor trap
pipe & filter
basket kit
Code KE



Removable cup shaped odor trap & filter basket kit
Inoxsystem[®] code "KTH"

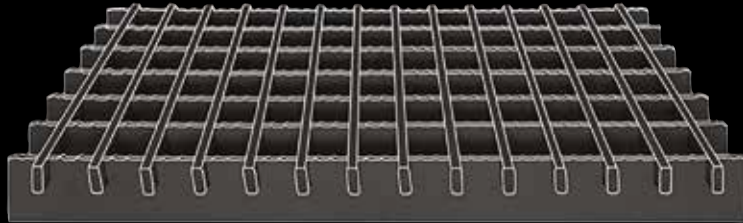

The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain.

It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.




Provided with
removable
cup shaped
odor trap & filter
basket kit
Code KTH

Stainless Steel - Think about your future

made of grade 304 stainless steel - grade 316 on request

Floor drains with square top plate and vertical outlet,
removable Total Hygienic internal odor trap pipe and filter basket.

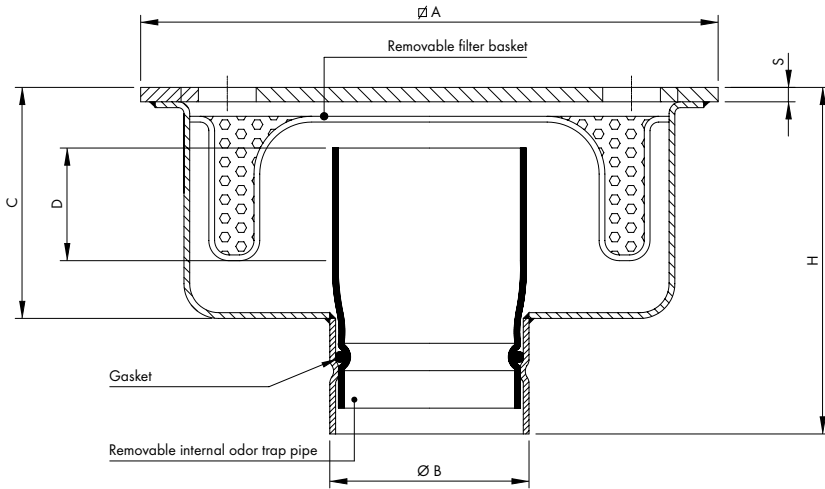

Dwg. No. 0116

Article	DIMENSIONS in mm						FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile										
R 75 V 206 E	200	6	75	70	20	140	60	120	1000	10000
75 V 206 E	200	6	75	110	50	180	60	120	1000	10000
R 75 V 308 E	300	8	75	65	20	140	80	240	1000	10000
75 V 308 E	300	8	75	110	50	180	80	240	1000	10000
R 110 V 308 E	300	8	110	65	20	170	135	340	1000	10000
110 V 308 E	300	8	110	110	50	210	135	340	1000	10000


* Outlet Ø 63 mm available on request.
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Provided with
removable
odor trap
pipe & filter
basket kit
Code KE



Floor drains with square top plate and horizontal outlet,
removable TotalHygienic internal odor trap pipe and filter basket.

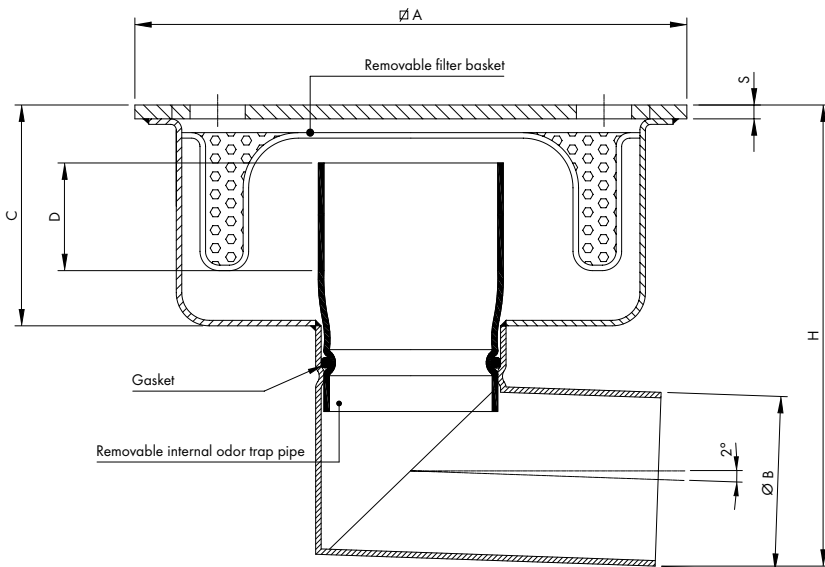

Dwg. No. 0016

Article	DIMENSIONS in mm						FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile										
R 75 L 206 E	200	6	75	70	20	180	60	120	1000	10000
75 L 206 E	200	6	75	110	50	220	60	120	1000	10000
R 75 L 308 E	300	8	75	65	20	175	80	240	1000	10000
75 L 308 E	300	8	75	110	50	220	80	240	1000	10000
R 110 L 308 E	300	8	110	65	20	220	135	340	1000	10000
110 L 308 E	300	8	110	110	50	265	135	340	1000	10000

* Outlet Ø 63 mm available on request (lower overall installation height).
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1




Provided with
removable
odor trap
pipe & filter
basket kit
Code KE



By removing both filter basket and internal pipe the wastewater flows and the floor drain should be thoroughly cleaned.
It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.



Floor drains with square top plate and vertical outlet, removable Total Hygienic cup shaped odor trap and filter basket.

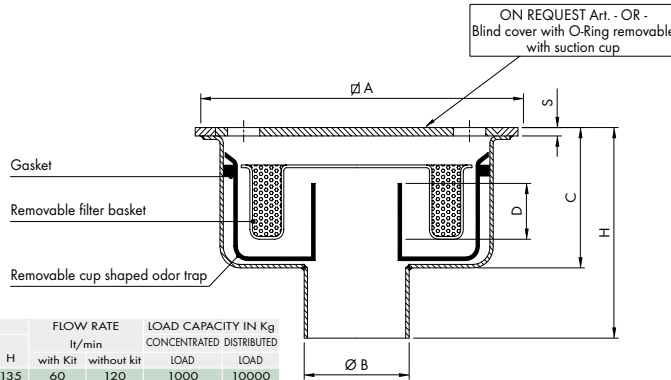


Article	DIMENSIONS in mm							FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED	
R-low profile											
R 75 V 206 TH	200	6	75	70	20	135	60	120	1000	10000	
R 75 V 206 TH	200	6	75	110	50	175	60	120	1000	10000	
R 110 V 206 TH	200	6	110	70	20	135	60	120	1000	10000	
R 110 V 206 TH	200	6	110	110	50	175	60	120	1000	10000	
R 75 V 308 TH	300	8	75	65	20	130	80	240	1000	10000	
R 75 V 308 TH	300	8	75	110	50	175	80	240	1000	10000	
R 110 V 308 TH	300	8	110	65	20	130	135	340	1000	10000	
R 110 V 308 TH	300	8	110	110	50	175	135	340	1000	10000	

Dwg. No. 0115

* Different outlet diameters on request.
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

Floor drains with square top plate and horizontal outlet, removable Total Hygienic cup shaped odor trap and filter basket.

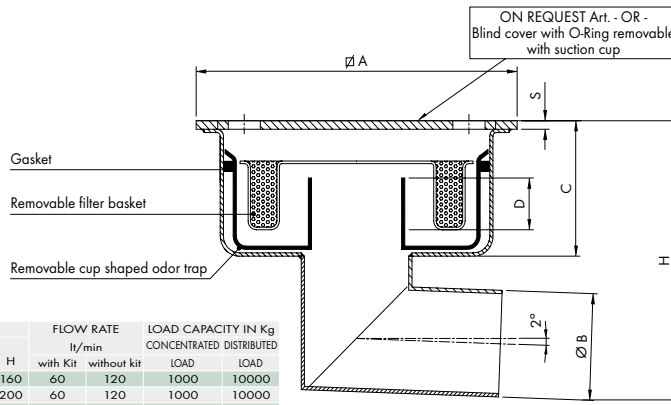


Article	DIMENSIONS in mm							FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED	
R-low profile											
R 75 L 206 TH	200	6	75	70	20	160	60	120	1000	10000	
R 75 L 206 TH	200	6	75	110	50	200	60	120	1000	10000	
R 110 L 206 TH	200	6	110	70	20	195	60	120	1000	10000	
R 110 L 206 TH	200	6	110	110	50	235	60	120	1000	10000	
R 75 L 308 TH	300	8	75	65	20	155	80	240	1000	10000	
R 75 L 308 TH	300	8	75	110	50	200	80	240	1000	10000	
R 110 L 308 TH	300	8	110	65	20	190	135	340	1000	10000	
R 110 L 308 TH	300	8	110	110	50	235	135	340	1000	10000	

Dwg. No. 0012

* Different outlet diameters on request (different overall installation height).
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

Ultra-low profile floor drains with horizontal outlet, removable Total Hygienic cup shaped odor trap.

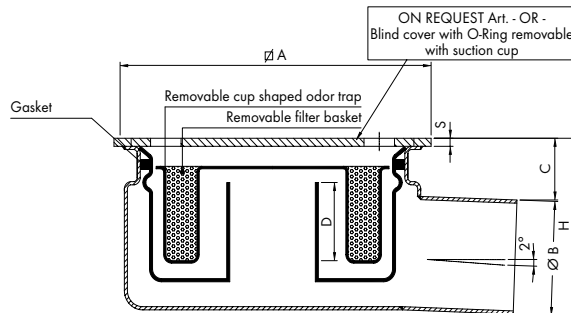

Article	DIMENSIONS in mm							FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED	
UR 50 L 206 TH	200	6	50	55	20	105	50	80	1000	10000	
UR 63 L 206 TH	200	6	63	42	20	105	60	120	1000	10000	
UR 75 L 206 TH	200	6	75	50	50	125	60	120	1000	10000	
UR 110 L 206 TH	200	6	110	45	50	155	60	120	1000	10000	
UR 50 L 308 TH	300	8	50	55	20	105	50	100	1000	10000	
UR 63 L 308 TH	300	8	63	42	20	105	60	140	1000	10000	
UR 75 L 308 TH	300	8	75	50	50	125	80	180	1000	10000	
UR 110 L 308 TH	300	8	110	45	50	155	125	340	1000	10000	

Dwg. No. 0002


* Different outlet diameters on request.
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.




made of grade 304 stainless steel - grade 316 on request

Gullies with grating and vertical outlet, removable Total Hygienic internal odor trap pipe and filter basket.

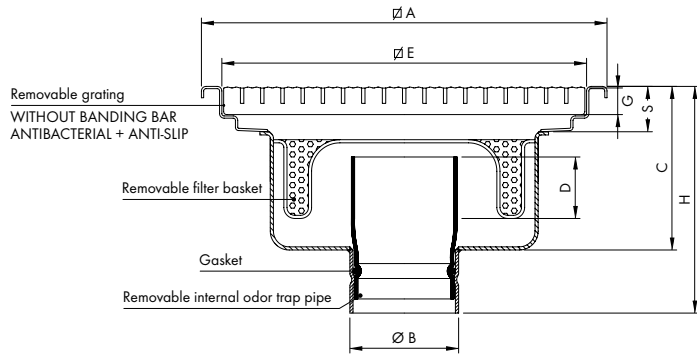

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Dwg. No. 0510

Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	R-low profile	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	LOAD
R PGV 200 75 E	200	170	25	30	75	95	20	165	60	160	850	6500
PGV 200 75 E	200	170	25	30	75	135	50	205	60	160	850	6500
R PGV 300 75 E	300	170	25	45	75	100	20	170	80	180	850	6500
PGV 300 75 E	300	170	25	45	75	145	50	215	80	180	850	6500
R PGV 300 110 E	300	250	25	45	110	100	20	200	135	340	850	6500
PGV 300 110 E	300	250	25	45	110	145	50	245	135	340	850	6500
R PGV 400 110 E	400	350	25	45	110	100	20	200	135	340	600	5000
PGV 400 110 E	400	350	25	45	110	145	50	245	135	340	600	5000
R PGV 500 110 E	500	450	25	45	110	100	20	200	135	340	450	3500
PGV 500 110 E	500	450	25	45	110	145	50	245	135	340	450	3500




* Outlet Ø 63 mm available on request.


N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Gullies with grating and horizontal outlet, removable Total Hygienic internal odor trap pipe and filter basket.

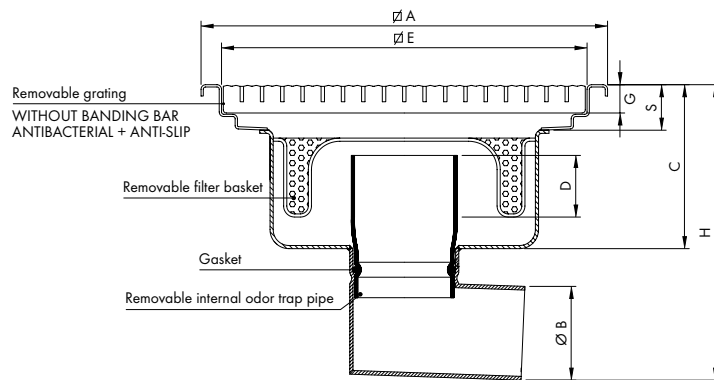

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Dwg. No. 0410

Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	R-low profile	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	LOAD
R PGO 200 75 E	200	170	25	30	75	95	20	205	60	160	850	6500
PGO 200 75 E	200	170	25	30	75	135	50	245	60	160	850	6500
R PGO 300 75 E	300	170	25	45	75	100	20	210	80	180	850	6500
PGO 300 75 E	300	170	25	45	75	145	50	255	80	180	850	6500
R PGO 300 110 E	300	250	25	45	110	100	20	255	135	340	850	6500
PGO 300 110 E	300	250	25	45	110	145	50	300	135	340	850	6500
R PGO 400 110 E	400	350	25	45	110	100	20	255	135	340	600	5000
PGO 400 110 E	400	350	25	45	110	145	50	300	135	340	600	5000
R PGO 500 110 E	500	450	25	45	110	100	20	255	135	340	450	3500
PGO 500 110 E	500	450	25	45	110	145	50	300	135	340	450	3500



* Outlet Ø 63 mm available on request (lower overall installation height).

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



By removing both filter basket and internal pipe the wastewater flows and the floor drain should be thoroughly cleaned. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.



made of grade 304 stainless steel - grade 316 on request

Gullies with grating and vertical outlet, removable TotalHygienic cup shaped odor trap and filter basket.




Dwg. No. 0511


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile												
R PGV 200 75 TH	200	170	25	30	75	95	20	160	60	160	850	6500
PGV 200 75 TH	200	170	25	30	75	135	50	200	60	160	850	6500
R PGV 200 110 TH	200	170	25	30	110	95	20	160	60	240	850	6500
PGV 200 110 TH	200	170	25	30	110	135	50	200	60	240	850	6500
R PGV 300 75 TH	300	250	25	45	75	100	20	170	80	180	850	6500
PGV 300 75 TH	300	250	25	45	75	145	20	210	80	180	850	6500
R PGV 300 110 TH	300	250	25	45	110	100	20	170	135	340	850	6500
PGV 300 110 TH	300	250	25	45	110	145	50	210	135	340	850	6500
R PGV 400 110 TH	400	350	25	45	110	100	20	170	135	340	600	5000
PGV 400 110 TH	400	350	25	45	110	145	50	210	135	340	600	5000
R PGV 500 110 TH	500	450	25	45	110	100	20	170	135	340	450	3500
PGV 500 110 TH	500	450	25	45	110	145	50	210	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

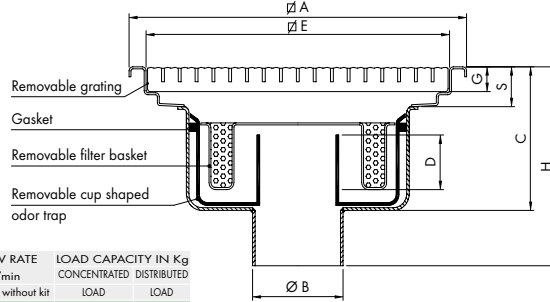

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Gullies with grating and horizontal outlet, removable Total Hygienic cup shaped odor trap and filter basket.




Dwg. No. 0411


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile												
R PGO 200 75 TH	200	170	25	30	75	95	20	185	60	160	850	6500
PGO 200 75 TH	200	170	25	30	75	135	50	225	60	160	850	6500
R PGO 200 110 TH	200	170	25	30	110	95	20	220	60	240	850	6500
PGO 200 110 TH	200	170	25	30	110	135	50	260	60	240	850	6500
R PGO 300 75 TH	300	250	25	45	75	100	20	190	80	180	850	6500
PGO 300 75 TH	300	250	25	45	75	145	50	235	80	180	850	6500
R PGO 300 110 TH	300	250	25	45	110	100	20	225	135	340	850	6500
PGO 300 110 TH	300	250	25	45	110	145	50	270	135	340	850	6500
R PGO 400 110 TH	400	350	25	45	110	100	20	225	135	340	600	5000
PGO 400 110 TH	400	350	25	45	110	145	50	270	135	340	600	5000
R PGO 500 110 TH	500	350	25	45	110	100	20	225	135	340	450	3500
PGO 500 110 TH	500	350	25	45	110	145	50	270	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

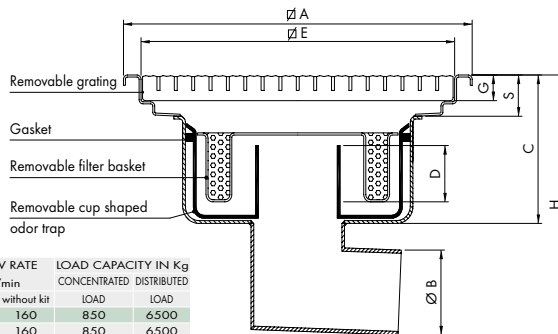

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Ultra-low profile gullies with grating with horizontal outlet, removable TotalHygienic cup shaped odor trap.




Dwg. No. 0409


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
UR PGO 200 50 TH	200	170	25	30	50	85	20	135	50	80	850	6500
UR PGO 200 63 TH	200	170	25	30	63	72	20	135	60	120	850	6500
UR PGO 200 75 TH	200	170	25	30	75	70	50	145	60	160	850	6500
UR PGO 200 110 TH	200	170	25	30	110	65	50	175	60	240	850	6500
UR PGO 300 50 TH	300	250	25	45	50	100	20	150	50	100	850	6500
UR PGO 300 63 TH	300	250	25	45	63	87	20	150	60	140	850	6500
UR PGO 300 75 TH	300	250	25	45	75	85	50	160	80	180	850	6500
UR PGO 300 110 TH	300	250	25	45	110	80	50	190	135	340	850	6500
UR PGO 400 110 TH	400	450	25	45	110	80	50	190	135	340	600	5000
UR PGO 500 110 TH	500	450	25	45	110	80	50	190	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

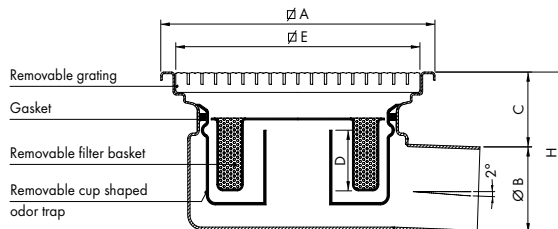

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain.
It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.



made of grade 304 stainless steel - grade 316 on request

Inoxsystem® Total Hygienic Standard modular channel with connection flanges, reinforces edges, gullies with odor trap, etc.

Dwg. No. 5001

ON REQUEST Art. - FLCTH -
Connection flanges for easy transport and installation provided with silicone and stainless steel fixing screws

TH0871 Total Hygienic removable grating
ANTIBACTERIAL and ANTI-SLIP without banding bar
(LOAD CLASS D400 CERTIFIED)

Fully inspectable

Closely spaced reinforcement rods \varnothing 8 mm

ON REQUEST reinforced edges filled with epoxy resin Art. - BCR -
(LOAD CLASS D400 CERTIFIED)

Mounting brackets

Reduced starting depth

h 68 mm on request

STANDARD starting depth

STANDARD end depth 12 lm max

INCREASED end depth 25 lm max

With built-in slope

ROUND INTERNAL CORNERS

ON REQUEST Adjustable levelling feet Art. - PL -

Reinforced edges Art. - BCR -




Article	Description
TH100	100 mm wide Inoxsystem® Total Hygienic channel with satin finished edges, provided with TotalHygienic Multislot grating. Entirely made of 4 mm thick stainless steel, this grating is removable, without banding bar, with anti slip serrated micro-shot peened surface, rated for heavy equipment use.

Accessories	Description
BCR	Frame edge filled manually with epoxy resin*
FLCTH	Connection flanges for transport and installation
SCTH	Weld joint
UITH	Gully-channel connection
PL	Adjustable levelling feet
A90TH	Channel angle
IL	1/2" inlet socket to let water flush in and clean the drain
TCTH	Butt weld end cap
SD	Direct outlet welded on channel body
INOX316	Stainless steel grade 316 on request

Different types of Total Hygienic gratings available on request - See pages 50 and 51

Inoxsystem®
Total Hygienic TH100
channel with
epoxy filled
edges is



Inoxsystem® Total Hygienic grating types

See pages 50 and 51

Standard *

G0871


G0872

G0873

G0874

G0875

Dwg above: Dwg. 0871

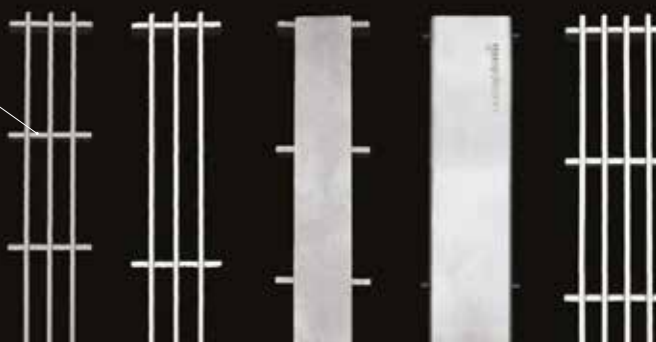

* Our #TotalHygienic channels are supplied with multi-slot grating as "Standard"

Dimensions can be modified on request


These technical drawings are property of INOXSYSTEM® and cannot be copied or reproduced without our prior written permission

TOTAL HYGIENIC DRAINAGE SYSTEMS



made of grade 304 stainless steel - grade 316 on request


71 mm wide Inoxsystem® Total Hygienic channel with vertical edges.

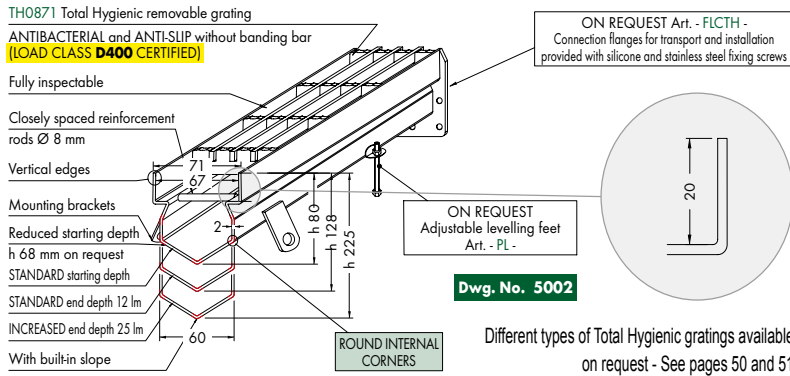

Article	Description
TH70BDV	71 mm wide Inoxsystem® Total Hygienic channel with vertical edges, provided with TotalHygienic multi slot grating. Entirely made of 4 mm thick stainless steel, this grating is removable, without banding bar, with anti slip serrated micro-shot peened surface, rated for heavy equipment use.

See page 48 for accessories


78 mm wide Inoxsystem® Total Hygienic channel with vertical FOLDED edges.

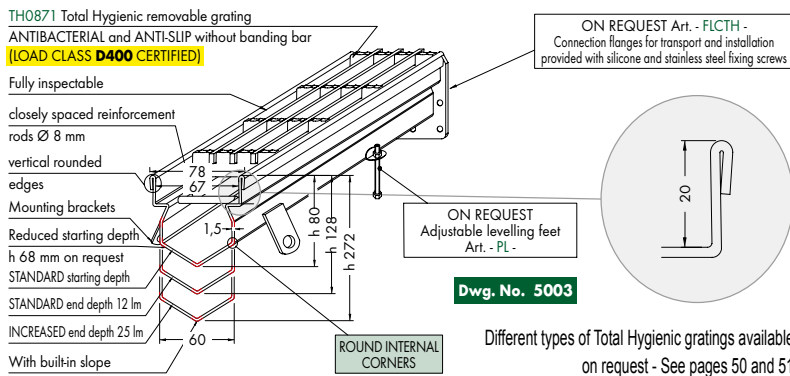

Article	Description
TH80PS	78 mm wide Inoxsystem® Total Hygienic channel with vertical folded edges, provided with TotalHygienic multi slot grating. Entirely made of 4 mm thick stainless steel, this grating is removable, without banding bar, with anti slip serrated micro-shot peened surface, rated for heavy equipment use.

See page 48 for accessories


100 mm wide Inoxsystem® Total Hygienic channel with visible top edges and flange for waterproof membrane application.

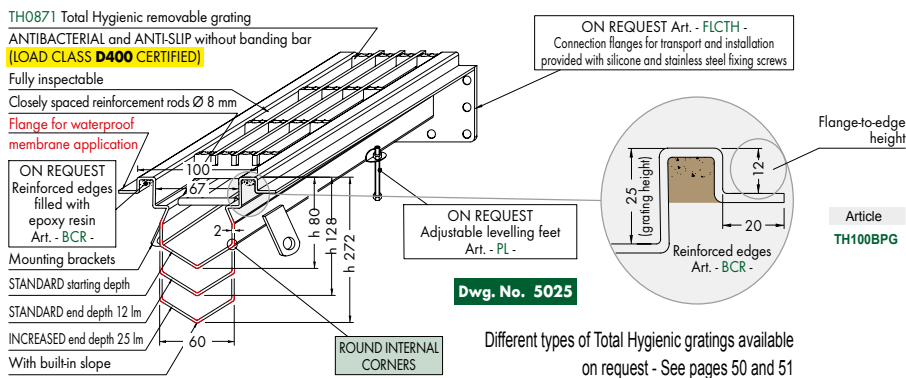

Article	Description
TH100BPG	100 mm wide Inoxsystem® Total Hygienic channel with satin finished top edge and flange for waterproof membrane application, provided with Total Hygienic multi slot grating. Entirely made of 4 mm thick stainless steel, this grating is removable, without banding bar, with anti slip serrated micro-shot peened surface, rated for heavy equipment use.

See page 48 for accessories

78 mm wide Inoxsystem® Total Hygienic channel with vertical folded edges and flange for waterproof membrane application.

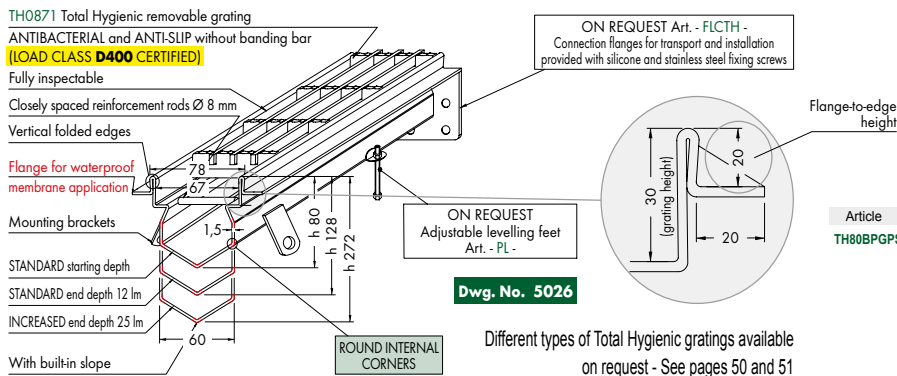

Article	Description
TH80BPGPS	78 mm wide Inoxsystem® Total Hygienic channel with vertical folded edges and flange for waterproof membrane application, provided with Total Hygienic multi slot grating. Entirely made of 4 mm thick stainless steel, this grating is removable, without banding bar, with anti slip serrated micro-shot peened surface, rated for heavy equipment use.

See page 48 for accessories

Dimensions can be modified on request

These technical drawings are property of INOXSYSTEM® and cannot be copied or reproduced without our prior written permission



Inoxsystem® Total Hygienic GRATINGS - ROBUSTNESS, SAFETY AND HYGIENE

LOAD CLASS




CERTIFIED

IDEAL FOR FOOD PROCESSING FACILITIES, CIVIL AND INDUSTRIAL USE

Inoxsystem® Total Hygienic Multi-Slot and Double Slot gratings are ideal for professional kitchens, meat factories, dairies, oil mills, wineries, breweries, mineral water plants, bakeries, ice cream parlors, pharmaceutical plants and industrial facilities. Their frameless design along with rounded internal corners

of the channel ensure the highest standards of hygiene preventing dirt from accumulating on the channel edge and eliminating bacteria growth. Thanks to their notched surface these gratings meet anti-slip standard requirements.


Certifications: Inoxsystem® Total Hygienic channel with Multi-Slot or Double Slot grating and reinforced edges (art. TH+BCR) is third party certified to 400 Kn loading - D400 load class in accordance with UNI en 1433 Standard.

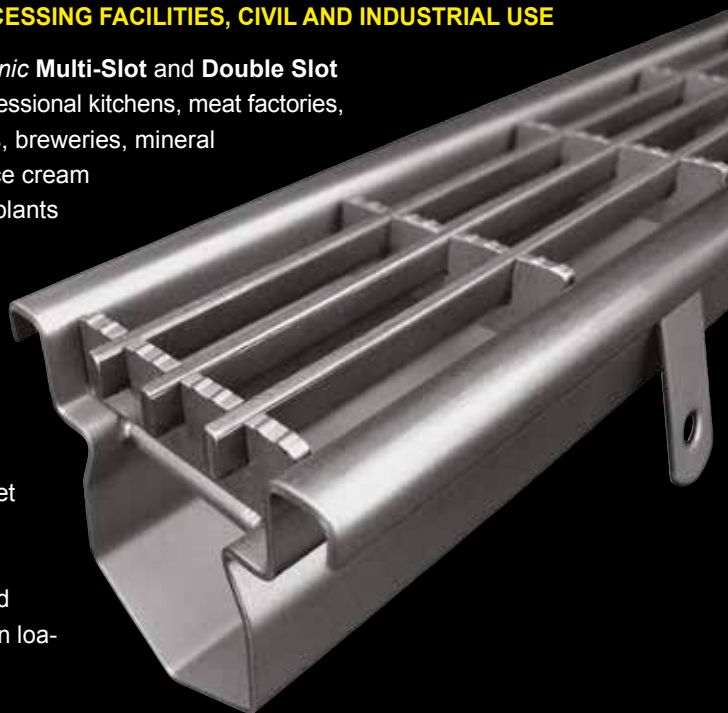

MULTISLOT

Total Hygienic MULTI-SLOT grating without banding bar, Mesh 13x80 mm h 20 mm
ANTISEPTIC - ANTISLIP
FOR HEAVY WEIGHT LOADS
LOAD CLASS D400

Dwg. No. 0871

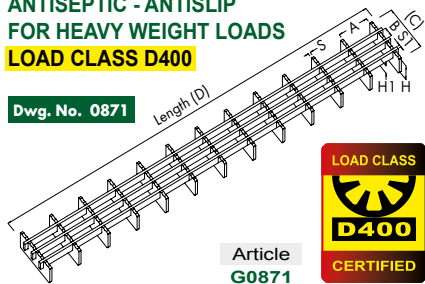

Article
G0871



Width C	Length D	Mesh BxA	Bearing bar HxS	Cross bar H1xS1
65	1000 (max)	13x80	20x4	10x4

Total Hygienic MULTI-SLOT grating without banding bar, Mesh 13x160 mm h 20 mm
ANTISEPTIC - ANTISLIP
FOR MEDIUM WEIGHT LOADS
LOAD CLASS C250

Dwg. No. 0872



Article
G0872

Width C	Length D	Mesh BxA	Bearing bar HxS	Cross bar H1xS1
65	1000 (max)	13x160	20x4	10x4



Dwg. No. 0871

* Our #Total Hygienic channels are supplied with multi-slot grating 0871 as standard

DOUBLE SLOT

Channel 5001 with grating G0873



Total Hygienic CLOSED GRATING WITH TWO SIDE SLOTS OF 12 mm, h 20 mm
ANTISEPTIC - ANTISLIP
FOR HEAVY WEIGHT LOADS
LOAD CLASS D400

Dwg. No. 0873



Article
G0873



Width C	Length D	Slots (C-B)/2	Mesh A	Bearing bar HxS	Upper plate BxH1
65	1000 (max)	12	160	20x4	40x8



Dwg. No. 0873

* Double slot grating 0873 available on request



Inoxsystem® Total Hygienic gratings - DESIGN AND DURABILITY

**IDEAL FOR
SWIMMING POOLS,
SHOWERS, TERRACES,
LOCKER ROOMS, PUBLIC AREAS**

Inoxsystem® Total Hygienic Design and Multi-slot Design gratings are ideal for swimming pools, terraces, changing rooms, Spa, hotels, public facilities as well as for pharmaceutical and industrial plants. Their frameless design ensures the highest standards of hygiene and the care of details makes them a perfect mix of elegance and functionality where modern design is required. **Tileable Design grating** is also available.



DESIGN

Channel 5001 with grating G0874



Total Hygienic DESIGN grating - satin finished closed grating with TWO SIDE SLOTS OF 4 mm h 20 mm, frameless design ANTISEPTIC - LIGHT DUTY LOAD CLASS A15

Dwg. No. 0874



Tileable on request

Article G0874

Width C	Length D	Grating B	Slots (C-B)/2	Spacers A
65	1000 (max)	57	4	200



Dwg. No. 0874

* Design grating 0874 available on request

Other patterns available on request (see IDrain catalogue)

MULTI-SLOT DESIGN

Channel 5001 with grating G0875



Total Hygienic MULTI-SLOT DESIGN grating, frameless design, mesh 10x250 mm h 20 mm ANTISEPTIC MEDIUM DUTY LOAD CLASS B125

Dwg. No. 0875



Article G0875

Width C	Length D	Mesh BxS	Bearing bar HxS	Cross bar H1xS1
65	1000 (max)	10x250	20x4	10x4




Dwg. No. 0875

* Design grating 0875 available on request



made of grade 304 stainless steel - grade 316 on request

Floor drains with square top plate and vertical outlet, with one floor drain-channel connection
removable Total Hygienic internal odor trap pipe and filter basket.

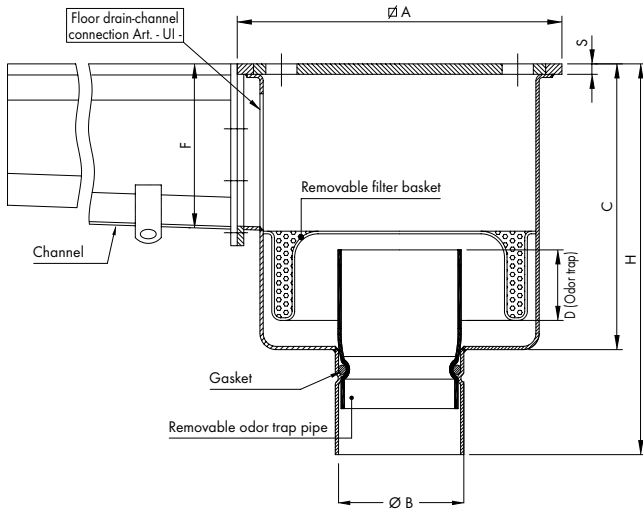


Dwg. No. 0110

Article	DIMENSIONS IN mm							FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B	F (max)	C	D	H	with Kit	without kit	CONCENTRATED LOAD
R CV 75 206 E	200	6	75*	95	150	20	220	60	160	1000	10000
CV 75 206 E	200	6	75*	130	220	50	290	60	160	1000	10000
R CV 75 308 E	300	8	75*	95	150	20	220	80	180	1000	10000
CV 75 308 E	300	8	75*	130	220	50	290	80	180	1000	10000
R CV 110 308 E	300	8	110*	95	150	20	250	135	340	1000	10000
CV 110 308 E	300	8	110*	130	220	50	320	135	340	1000	10000

* Outlet Ø 63 mm available on request.
 N.B.: Heights valid for channels with maximum length 12 m
 N.B.: water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Floor drains with square top plate and horizontal outlet, with one floor drain-channel connection
removable Total Hygienic internal odor trap pipe and filter basket.

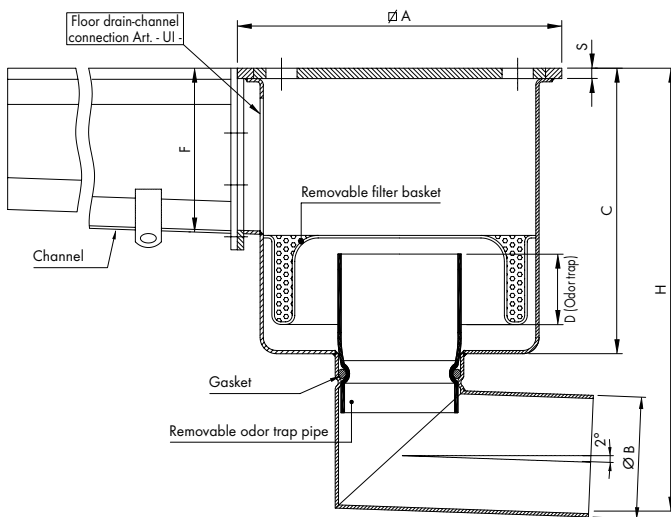

Dwg. No. 0005

Article	DIMENSIONS IN mm							FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B	F (max)	C	D	H	with Kit	without kit	CONCENTRATED LOAD
R CL 75 206 E	200	6	75*	95	150	20	260	60	160	1000	10000
CL 75 206 E	200	6	75*	130	220	50	330	60	160	1000	10000
R CL 75 308 E	300	8	75*	95	150	20	260	80	180	1000	10000
CL 75 308 E	300	8	75*	130	220	50	330	80	180	1000	10000
R CL 110 308 E	300	8	110*	95	150	20	305	135	340	1000	10000
CL 110 308 E	300	8	110*	130	220	50	375	135	340	1000	10000

* Outlet Ø 63 mm available on request.
 N.B.: Heights valid for channels with maximum length 12 m
 N.B.: water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1




By removing both filter basket and internal odor trap pipe the wastewater flows and the floor drain should be thoroughly cleaned.
 It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.



made of grade 304 stainless steel - grade 316 on request

Floor drains with square top plate and vertical outlet, with one floor drain-channel connection, removable Total Hygienic cup shaped odor trap pipe and filter basket.

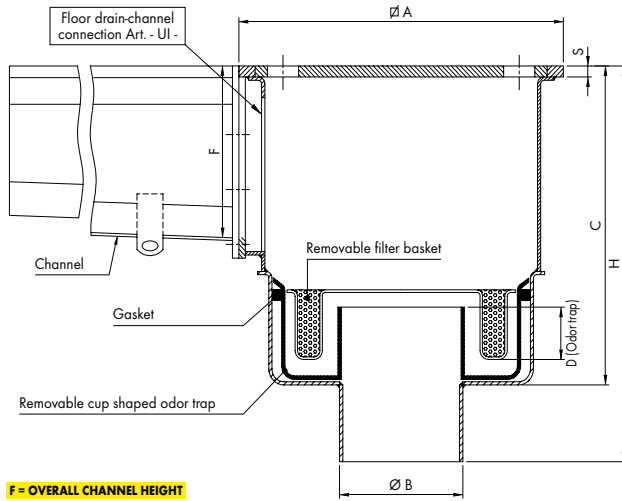

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0111

Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED
R CV 75 206 TH	200	6	75	F#80	20	F#145	60	160	1000	10000
CV 75 206 TH	200	6	75	F#120	50	F#185	60	160	1000	10000
R CV 110 206 TH	200	6	110	F#80	20	F#145	60	240	1000	10000
CV 110 206 TH	200	6	110	F#120	50	F#185	60	240	1000	10000
R CV 75 308 TH	300	8	75	F#70	20	F#135	80	180	1000	10000
CV 75 308 TH	300	8	75	F#120	50	F#185	80	180	1000	10000
R CV 110 308 TH	300	8	110	F#70	20	F#135	135	340	1000	10000
CV 110 308 TH	300	8	110	F#120	50	F#185	135	340	1000	10000

* Different diameters on request.


N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Provided with removable cup shaped odor trap & filter basket kit
Code KTH



Ultra-low profile floor drains with square top plate and horizontal outlet, with one floor drain-channel connection removable Total Hygienic cup shaped odor trap pipe and filter basket.

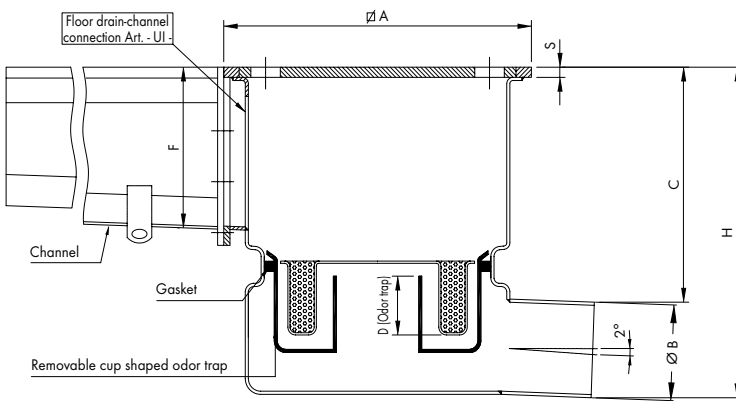

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0004

Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED
UR CL 50 206 TH	200	6	50	F#50	20	F#110	50	80	1000	10000
UR CL 63 206 TH	200	6	63	F#47	20	F#110	60	120	1000	10000
UR CL 75 206 TH	200	6	75	F#55	20	F#130	60	160	1000	10000
UR CL 110 206 TH	200	6	110	F#50	50	F#160	60	240	1000	10000
UR CL 50 308 TH	300	8	50	F#60	20	F#110	50	100	1000	10000
UR CL 63 308 TH	300	8	63	F#47	20	F#110	60	180	1000	10000
UR CL 75 308 TH	300	8	75	F#55	20	F#130	80	240	1000	10000
UR CL 110 308 TH	300	8	110	F#50	50	F#160	135	340	1000	10000

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1




Provided with removable cup shaped odor trap & filter basket kit
Code KTH



The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

made of grade 304 stainless steel - grade 316 on request


Gullies with grating and vertical outlet, with one gully-channel connection removable Total Hygienic internal odor trap pipe and filter basket.

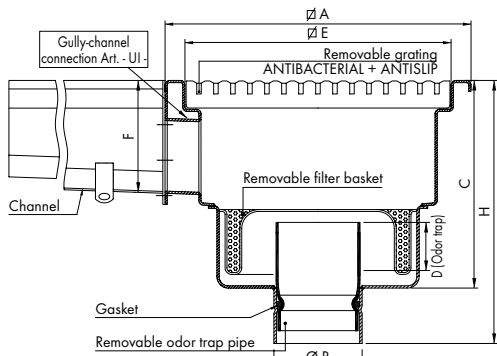

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0310

Total Hygienic Multi-Slot grating without banding bar ANTIBACTERIAL + ANTI-SLIP



Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg		
	R=low profile	Ø A	Ø E	Ø B*	C	D	H	with Kit	without kit	LOAD	LOAD
R CGV 300 75 E	300	250	75	F+80	20	F+150	80	180	850	6500	
CGV 300 75 E	300	250	75	F+120	50	F+190	80	180	850	6500	
R CGV 300 110 E	300	250	110	F+80	20	F+180	135	340	850	6500	
CGV 300 110 E	300	250	110	F+120	50	F+220	135	340	850	6500	
R CGV 400 110 E	400	350	110	F+80	20	F+180	135	340	600	5000	
CGV 400 110 E	400	350	110	F+120	50	F+220	135	340	600	5000	
R CGV 500 110 E	500	450	110	F+80	20	F+180	135	340	450	3500	
CGV 500 110 E	500	450	110	F+120	50	F+220	135	340	450	3500	




Provided with removable odor trap pipe & filter basket kit Code KE

* Outlet Ø 63 mm available on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Gullies with grating and horizontal outlet, with one gully-channel connection removable Total Hygienic internal odor trap pipe and filter basket.

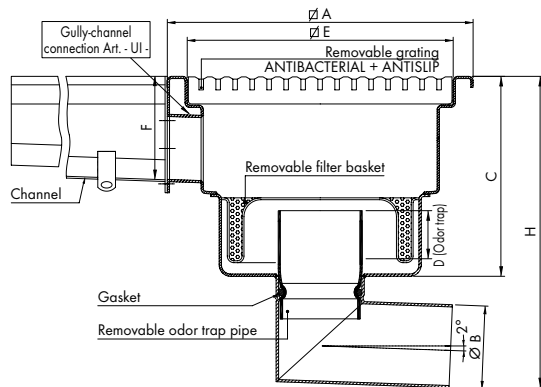

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0305

Total Hygienic Multi-Slot grating without banding bar ANTIBACTERIAL + ANTI-SLIP



Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg		
	R=low profile	Ø A	Ø E	Ø B*	C	D	H	with Kit	without kit	LOAD	LOAD
R CGL 300 75 E	300	250	75	F+80	20	F+190	80	180	850	6500	
CGL 300 75 E	300	250	75	F+120	50	F+230	80	180	850	6500	
R CGL 300 110 E	300	250	110	F+80	20	F+235	135	340	850	6500	
CGL 300 110 E	300	250	110	F+120	50	F+275	135	340	850	6500	
R CGL 400 110 E	400	350	110	F+80	20	F+235	135	340	600	5000	
CGL 400 110 E	400	350	110	F+120	50	F+275	135	340	600	5000	
R CGL 500 110 E	500	450	110	F+80	20	F+235	135	340	450	3500	
CGL 500 110 E	500	450	110	F+120	50	F+275	135	340	450	3500	



Provided with removable odor trap pipe & filter basket kit Code KE

* Outlet Ø 63 mm available on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1




By removing both filter basket and internal odor trap pipe the wastewater flows and the floor drain should be thoroughly cleaned. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

TOTAL HYGIENIC DRAINAGE SYSTEMS



made of grade 304 stainless steel - grade 316 on request


Gullies with grating and vertical outlet, with one gully-channel connection removable Total Hygienic cup shaped odor trap pipe and filter basket.

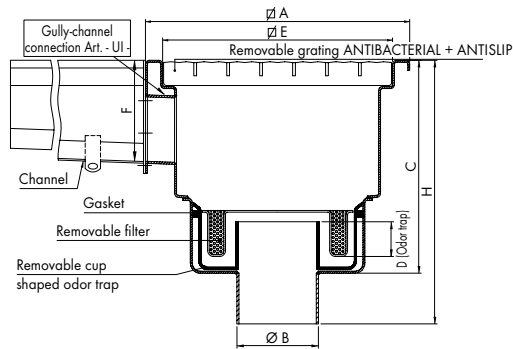

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0311

Total Hygienic Multi-Slot grating without banding bar ANTIBACTERIAL + ANTI-SLIP



Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-CGV 300 75 TH	300	250	75	F80	20	F145	80	180	850	6500
CGV 300 75 TH	300	250	75	F120	50	F185	80	180	850	6500
R-CGV 300 110 TH	300	250	110	F80	20	F145	135	340	850	6500
CGV 300 110 TH	300	250	110	F120	50	F185	135	340	850	6500
R-CGV 400 110 TH	400	350	110	F80	20	F145	135	340	600	5000
CGV 400 110 TH	400	350	110	F120	50	F185	135	340	600	5000
R-CGV 500 110 TH	500	450	110	F80	20	F145	135	340	450	3500
CGV 500 110 TH	500	450	110	F120	50	F185	135	340	450	3500

* Different diameters on request.


N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Provided with removable cup shaped odor trap & filter basket kit Code KTH




Ultra low-profile gully with grating and horizontal outlet, with one gully-channel connection removable Total Hygienic cup shaped odor trap.

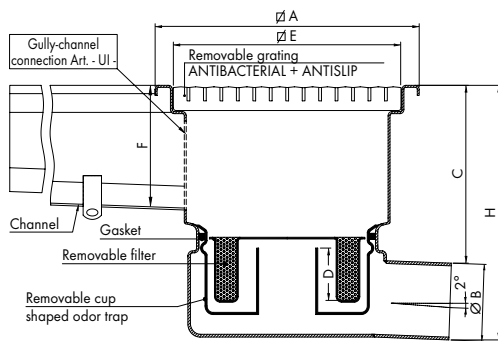

F = OVERALL CHANNEL HEIGHT

Dwg. No. 0304

Total Hygienic Multi-Slot grating without banding bar ANTIBACTERIAL + ANTI-SLIP



Article	DIMENSIONS IN mm						FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-CGL 300 50 TH	300	250	50	F60	20	F110	80	180	850	6500
UR-CGL 300 50 TH	300	250	50	F47	20	F110	135	340	850	6500
UR-CGL 300 75 TH	300	250	75	F47	20	F110	80	180	850	6500
UR-CGL 300 110 TH	300	250	110	F47	20	F110	135	340	850	6500
UR-CGL 400 110 TH	400	350	110	F47	20	F110	135	340	600	5000
UR-CGL 500 110 TH	500	450	110	F47	20	F110	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Provided with removable cup shaped odor trap & filter basket kit Code KTH



The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

www.inoxsystem.it TOTAL HYGIENIC DRAINAGE SYSTEMS




Line 4050

- Inoxsystem® Total Hygienic channel
- Satin finished top edge
- Antibacterial and antislip grating, mesh 13x80 mm h 20 mm
- Gully with 300x300 mm top plate 8 mm thick, outlet Ø 110 mm

- With removable Inoxsystem® Total Hygienic internal odor trap pipe
- Removable rat proof filter basket
- See page 49 for other types of channels


On request: reinforced edges Art. "BCR"

Built in slope



Provided with removable odor trap pipe & filter basket kit
Code KE


CENTRAL VERTICAL OUTLET

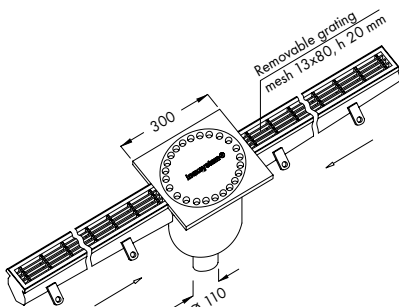

art. CGVCPE

Dwg. No. 4053

CENTRAL HORIZONTAL OUTLET

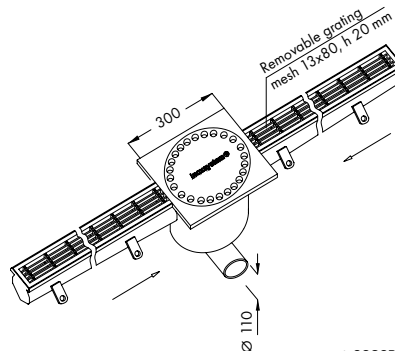


art. CGOOCPE

Dwg. No. 4051

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 52


END VERTICAL OUTLET



art. CGVTCPE

Dwg. No. 4054

END HORIZONTAL OUTLET



art. CGOTCPE

Dwg. No. 4052



Line 4060

- Inoxsystem® Total Hygienic channel
- Satin finished top edge
- Antibacterial and antislip grating, mesh 13x80 mm h 20 mm
- Gully with 300x300 mm top plate 8 mm thick, outlet Ø 110 mm

- With removable Inoxsystem® Total Hygienic cup shaped odor trap
- Removable rat proof filter basket
- See page 49 for other types of channels


On request: reinforced edges Art. "BCR"

Built in slope



Provided with removable cup shaped odor trap & filter basket kit
Code KTH


CENTRAL VERTICAL OUTLET

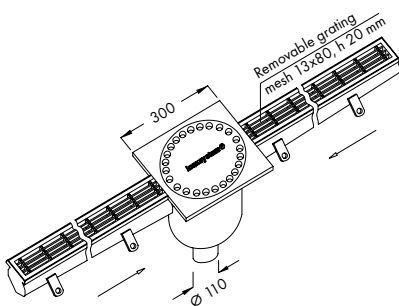

art. CGVCPTH

Dwg. No. 4063

CENTRAL HORIZONTAL OUTLET

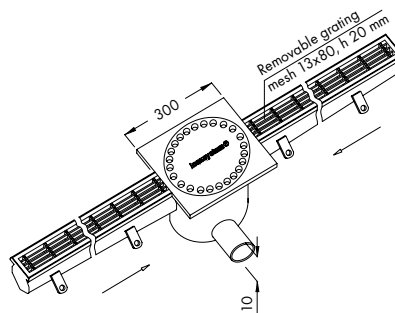


art. CGOCPH

Dwg. No. 4061

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 53


END VERTICAL OUTLET



art. CGVTCPTH

Dwg. No. 4064

END HORIZONTAL OUTLET



art. CGOTCPH

Dwg. No. 4062




Line 4070

- Inoxsystem® Total Hygienic channel
- Satin finished top edge
- Antibacterial and antislip grating, mesh 13x80 mm h 20 mm
- 300x300 mm gully with grating, outlet \varnothing 110 mm


- With removable Inoxsystem® Total Hygienic internal odor trap pipe
- Removable rat proof filter basket
- See page 49 for other types of channels

On request: reinforced edges Art. "BCR"

Built in slope




CENTRAL VERTICAL OUTLET

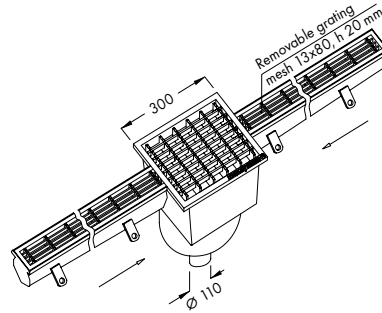

art. CGVCGE

Dwg. No. 4073

CENTRAL HORIZONTAL OUTLET

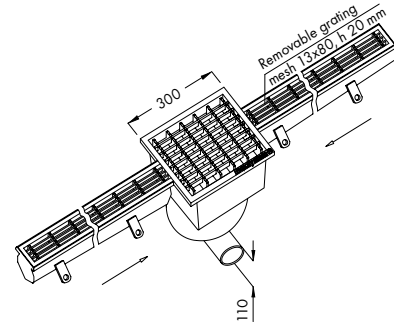


art. CGOCGE

Dwg. No. 4071

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 54


END VERTICAL OUTLET



art. CGVTCGE

Dwg. No. 4074

END HORIZONTAL OUTLET

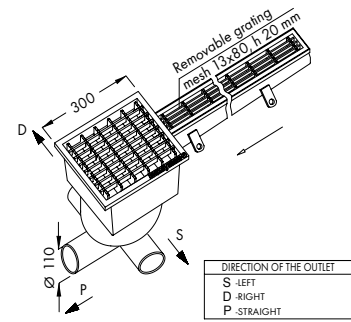

art. CGOTCGE

Dwg. No. 4072


Line 4080

- Inoxsystem® Total Hygienic channel
- Satin finished top edge
- Antibacterial and antislip grating, mesh 13x80 mm h 20 mm
- 300x300 mm gully with grating, outlet \varnothing 110 mm


- With removable Inoxsystem® Total Hygienic cup shaped odor trap pipe
- Removable rat proof filter basket
- See page 49 for other types of channels

On request: reinforced edges Art. "BCR"

Built in slope




CENTRAL VERTICAL OUTLET

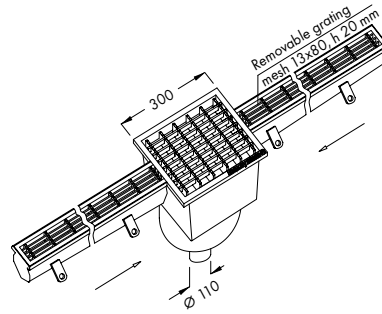

art. CGVCGTH

Dwg. No. 4083

CENTRAL HORIZONTAL OUTLET

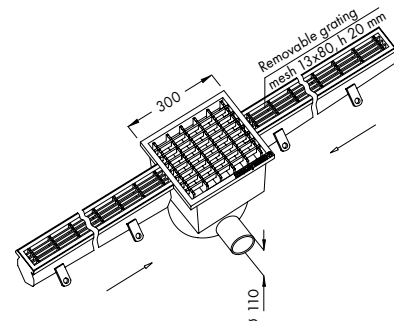


art. CGOCGTH

Dwg. No. 4081

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 55


END VERTICAL OUTLET



art. CGVTCGTH

Dwg. No. 4084

END HORIZONTAL OUTLET

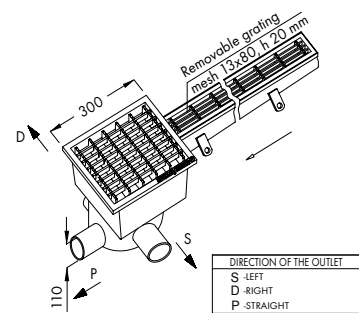

art. CGOTCGTH

Dwg. No. 4082




made of grade 304 stainless steel - grade 316 on request

Line 4150

- Slot channel with 20 mm standard slot
- Satin finished top edge
- Gully with 300x300 mm top plate 8 mm thick, outlet \varnothing 110 mm
- With removable Inoxsystem® Total Hygienic internal odor trap pipe
- Removable rat proof filter basket
- See page 12 and 13 for other types of channels

On request: reinforced edges Art. "BCR"


Built in slope



Provided with removable odor trap pipe & filter basket kit
Code KE




CENTRAL VERTICAL OUTLET



art. CFVE

Dwg. No. 4153

CENTRAL HORIZONTAL OUTLET




art. CFOE

Dwg. No. 4151

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 52


END VERTICAL OUTLET



art. CFVTE

Dwg. No. 4154

END HORIZONTAL OUTLET



DIRECTION OF THE OUTLET
S - LEFT
D - RIGHT
P - STRAIGHT



art. CFOTE **Dwg. No. 4152**

Line 4160

- Slot channel with 20 mm standard slot
- Satin finished top edge
- Gully with 300x300 mm top plate 8 mm thick, outlet \varnothing 110 mm
- With removable Inoxsystem® Total Hygienic cup shaped odor trap
- Removable rat proof filter basket
- See page 12 and 13 for other types of channels

On request: reinforced edges Art. "BCR"


Built in slope



Provided with removable cup shaped odor trap & filter basket kit
Code KTH




CENTRAL VERTICAL OUTLET



art. CFVTH

Dwg. No. 4163

CENTRAL HORIZONTAL OUTLET




art. CFOTH

Dwg. No. 4161

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 53


END VERTICAL OUTLET



art. CFVTH

Dwg. No. 4164

END HORIZONTAL OUTLET



DIRECTION OF THE OUTLET
S - LEFT
D - RIGHT
P - STRAIGHT


art. CFOTTH **Dwg. No. 4162**

Line 4170

- Slot channel with 20 mm standard slot
- Satin finished top edge
- 300x300 mm gully with grating, outlet \varnothing 110 mm
- Antibacterial and antislip grating
- With removable Inoxsystem® Total Hygienic internal odor trap pipe
- Removable rat proof filter basket
- See page 12 and 13 for other types of channels

On request: reinforced edges Art. "BCR"


Built in slope



Provided with removable odor trap pipe & filter basket kit
Code KE




CENTRAL VERTICAL OUTLET



art. CFVCGE

Dwg. No. 4173

CENTRAL HORIZONTAL OUTLET




art. CFOCGE

Dwg. No. 4171

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 54


END VERTICAL OUTLET



art. CFVCGE

Dwg. No. 4174

END HORIZONTAL OUTLET



DIRECTION OF THE OUTLET
S - LEFT
D - RIGHT
P - STRAIGHT



art. CFOTCGE **Dwg. No. 4172**

Line 4180

- Slot channel with 20 mm standard slot
- Satin finished top edge
- 300x300 mm gully with grating, outlet \varnothing 110 mm
- Antibacterial and antislip grating
- With removable Inoxsystem® Total Hygienic cup shaped odor trap
- Removable rat proof filter basket
- See page 12 and 13 for other types of channels

On request: reinforced edges Art. "BCR"


Built in slope



Provided with removable cup shaped odor trap & filter basket kit
Code KTH




CENTRAL VERTICAL OUTLET



art. CFVCGTH

Dwg. No. 4183

CENTRAL HORIZONTAL OUTLET




art. CFOCGTH

Dwg. No. 4181

FOR THE HEIGHT OF THE MANHOLES SEE TABLES ON PAGE 55


END VERTICAL OUTLET



art. CFVCGTH

Dwg. No. 4184

END HORIZONTAL OUTLET




DIRECTION OF THE OUTLET
S - LEFT
D - RIGHT
P - STRAIGHT

art. CFOTCGTH **Dwg. No. 4182**



ROUND BODY GULLY WELDED TO THE CHANNEL BODY (HERMETICALLY SEALED).
VERTICAL OUTLET WITH REMOVABLE "ODOR TRAP PIPE & FILTER BASKET" KIT - CODE KE

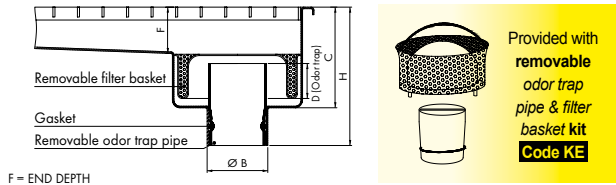

F = END DEPTH


Dwg. No. 0210

Gullies suitable for channel width 200/250 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTV 75 E	75	F+70	20	F+130	60	120
PCTV 75 E	75	F+110	50	F+170	60	120
R PCTV 110 E	/	/	/	/	/	/
PCTV 110 E	/	/	/	/	/	/

Gullies suitable for channel width ≥ 300 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTV 75 E	75	F+70	20	F+160	80	180
PCTV 75 E	75	F+110	50	F+170	80	180
R PCTV 110 E	110	F+70	20	F+170	135	340
PCTV 110 E	110	F+110	50	F+210	135	340

N.B. gullies with a depth water seal (dimension D) of 50 mm are in compliance with standard UNI EN 1253-1

ROUND BODY GULLY WELDED TO THE CHANNEL BODY (HERMETICALLY SEALED).
HORIZONTAL OUTLET WITH REMOVABLE "ODOR TRAP PIPE & FILTER BASKET" KIT - CODE KE

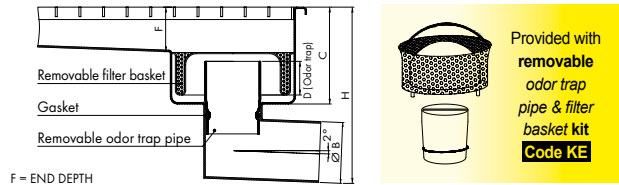

F = END DEPTH

Dwg. No. 0205



Gullies suitable for channel width 200/250 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTO 75 E	75	F+70	20	F+160	60	120
PCTO 75 E	75	F+110	50	F+200	60	120
R PCTO 110 E	/	/	/	/	/	/
PCTO 110 E	/	/	/	/	/	/

Gullies suitable for channel width ≥ 300 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTO 75 E	75	F+70	20	F+160	80	180
PCTO 75 E	75	F+110	50	F+200	80	180
R PCTO 110 E	110	F+70	20	F+195	135	340
PCTO 110 E	110	F+110	50	F+235	135	340


N.B. gullies with a depth water seal (dimension D) of 50 mm are in compliance with standard UNI EN 1253-1

Line 0930


- Channel with grating
- Standard grating mesh 25x22 h 25
- Total Hygienic antibacterial and antislip grating available on request
- Satin finished top edge
- Gully with outlet Ø 110 mm
- With removable Inoxsystem® Total Hygienic internal odor trap pipe
- Removable rat proof filter basket
- See page 16 for other types of channels



CENTRAL VERTICAL OUTLET




CENTRAL HORIZONTAL OUTLET




FOR THE HEIGHT OF THE MANHOLES SEE TABLES ABOVE


END VERTICAL OUTLET



END HORIZONTAL OUTLET



ROUND BODY GULLY WELDED TO THE CHANNEL BODY (HERMETICALLY SEALED).
VERTICAL OUTLET WITH REMOVABLE "CUP SHAPED ODOR TRAP & FILTER BASKET" KIT - CODE KTH

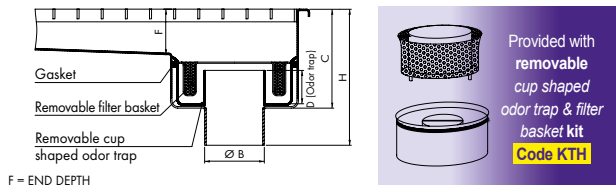

F = END DEPTH


Dwg. No. 0211

Gullies suitable for channel width 225/250 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTV 75 TH	75	F+70	20	F+130	60	120
PCTV 75 TH	75	F+110	50	F+170	60	120
R PCTV 110 TH	110	F+70	20	F+130	60	120
PCTV 110 TH	110	F+110	50	F+170	60	120

Gullies suitable for channel width ≥ 300 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
R PCTV 75 TH	75	F+70	20	F+130	80	180
PCTV 75 TH	75	F+110	50	F+170	80	180
R PCTV 110 TH	110	F+70	20	F+130	135	340
PCTV 110 TH	110	F+110	50	F+170	135	340

N.B. gullies with a depth water seal (dimension D) of 50 mm are in compliance with standard UNI EN 1253-1

ROUND BODY GULLY WELDED TO THE CHANNEL BODY (HERMETICALLY SEALED).
HORIZONTAL OUTLET WITH REMOVABLE "CUP SHAPED ODOR TRAP & FILTER BASKET" KIT - CODE KTH

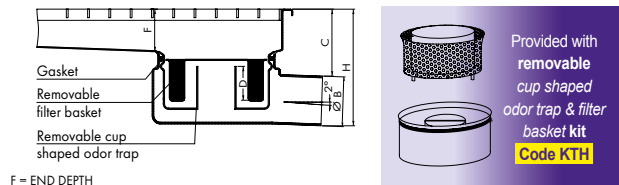

F = END DEPTH

Dwg. No. 0204


Gullies suitable for channel width 225/250 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
UR PCTO 50 TH	50	F+60	20	F+110	50	80
UR PCTO 63 TH	63	F+50	20	F+115	60	120
UR PCTO 75 TH	75	F+55	50	F+130	60	120
UR PCTO 110 TH	110	F+50	50	F+160	60	120

Gullies suitable for channel width ≥ 300 mm						
Article (gully)	Dimensions in mm			Flow rate l/min		
	Ø B	C	D	H	with kit	without kit
UR PCTO 50 TH	50	F+60	20	F+110	50	100
UR PCTO 63 TH	63	F+50	20	F+115	60	140
UR PCTO 75 TH	75	F+55	50	F+130	80	180
UR PCTO 110 TH	110	F+50	50	F+160	135	340


N.B. gullies with a depth water seal (dimension D) of 50 mm are in compliance with standard UNI EN 1253-1

Line 0940


- Channel with grating
- Standard grating mesh 25x22 h 25
- Total Hygienic antibacterial and antislip grating available on request
- Satin finished top edge
- Gully with outlet Ø 110 mm
- With removable Inoxsystem® Total Hygienic cup shaped odor trap
- Removable rat proof filter basket
- See page 16 for other types of channels



CENTRAL VERTICAL OUTLET




CENTRAL HORIZONTAL OUTLET




FOR THE HEIGHT OF THE MANHOLES SEE TABLES ABOVE

END VERTICAL OUTLET




END HORIZONTAL OUTLET






General catalogue #20

Deletes and replaces any previous version



See also our new lines Inoxsystem® *Infini* and Inoxsystem® *IDrain*

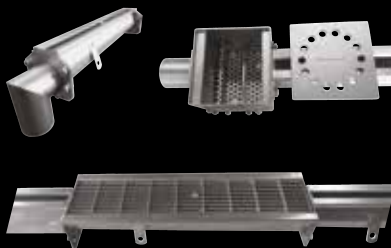

Inoxsystem®
STAINLESS STEEL
Think about your future

Infini
Modular drainage channels

Inoxsystem® IDrain

STEEL ARTICLES - STAINLESS STEEL PROCESSING - FLOOR DRAINAGE SYSTEMS

Via Dell'Artigianato, 33 - 36042 Breganze (VI) - Italy - Phone +39 0445.300876 - www.inoxsystem.it - info@inoxsystem.it