



made of grade 304 stainless steel - grade 316 on request

### Gullies with grating and vertical outlet, removable Total Hygienic internal odor trap pipe and filter basket.

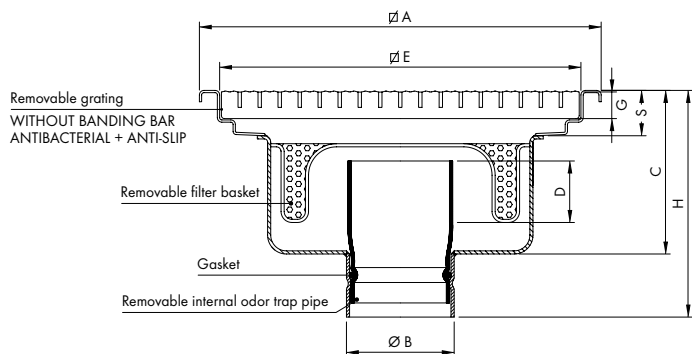

Total Hygienic Multislot grating without banding bar  
ANTIBACTERIAL + ANTI-SLIP

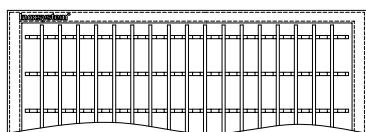

Dwg. No. 0510

Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	R-low profile	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	LOAD CONCENTRATED
R PGV 200 75 E	200	170	25	30	75	95	20	165	60	160	850	6500
PGV 200 75 E	200	170	25	30	75	135	50	205	60	160	850	6500
R PGV 300 75 E	300	170	25	45	75	100	20	170	80	180	850	6500
PGV 300 75 E	300	170	25	45	75	145	50	215	80	180	850	6500
R PGV 300 110 E	300	250	25	45	110	100	20	200	135	340	850	6500
PGV 300 110 E	300	250	25	45	110	145	50	245	135	340	850	6500
R PGV 400 110 E	400	350	25	45	110	100	20	200	135	340	600	5000
PGV 400 110 E	400	350	25	45	110	145	50	245	135	340	600	5000
R PGV 500 110 E	500	450	25	45	110	100	20	200	135	340	450	3500
PGV 500 110 E	500	450	25	45	110	145	50	245	135	340	450	3500




Provided with removable odor trap pipe & filter basket kit  
Code KE


\* Outlet Ø 63 mm available on request.  
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



### Gullies with grating and horizontal outlet, removable Total Hygienic internal odor trap pipe and filter basket.

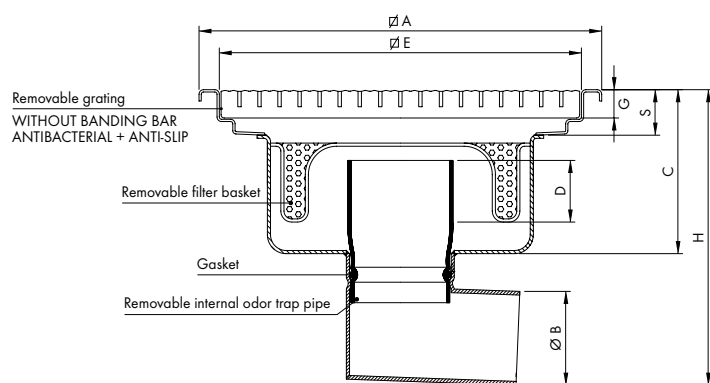

Total Hygienic Multislot grating without banding bar  
ANTIBACTERIAL + ANTI-SLIP

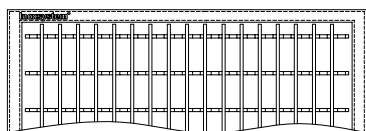

Dwg. No. 0410

Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	R-low profile	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	LOAD CONCENTRATED
R PGO 200 75 E	200	170	25	30	75	95	20	205	60	160	850	6500
PGO 200 75 E	200	170	25	30	75	135	50	245	60	160	850	6500
R PGO 300 75 E	300	170	25	45	75	100	20	210	80	180	850	6500
PGO 300 75 E	300	170	25	45	75	145	50	255	80	180	850	6500
R PGO 300 110 E	300	250	25	45	110	100	20	255	135	340	850	6500
PGO 300 110 E	300	250	25	45	110	145	50	300	135	340	850	6500
R PGO 400 110 E	400	350	25	45	110	100	20	255	135	340	600	5000
PGO 400 110 E	400	350	25	45	110	145	50	300	135	340	600	5000
R PGO 500 110 E	500	450	25	45	110	100	20	255	135	340	450	3500
PGO 500 110 E	500	450	25	45	110	145	50	300	135	340	450	3500



Provided with removable odor trap pipe & filter basket kit  
Code KE

\* Outlet Ø 63 mm available on request (lower overall installation height).  
N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



By removing both filter basket and internal pipe the wastewater flows and the floor drain should be thoroughly cleaned. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

