

made of grade 304 stainless steel - grade 316 on request

Gullies with grating and vertical outlet, removable TotalHygienic cup shaped odor trap and filter basket.




Dwg. No. 0511


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile												
R PGV 200 75 TH	200	170	25	30	75	95	20	160	60	160	850	6500
PGV 200 75 TH	200	170	25	30	75	135	50	200	60	160	850	6500
R PGV 200 110 TH	200	170	25	30	110	95	20	160	60	240	850	6500
PGV 200 110 TH	200	170	25	30	110	135	50	200	60	240	850	6500
R PGV 300 75 TH	300	250	25	45	75	100	20	170	80	180	850	6500
PGV 300 75 TH	300	250	25	45	75	145	20	210	80	180	850	6500
R PGV 300 110 TH	300	250	25	45	110	100	20	170	135	340	850	6500
PGV 300 110 TH	300	250	25	45	110	145	50	210	135	340	850	6500
R PGV 400 110 TH	400	350	25	45	110	100	20	170	135	340	600	5000
PGV 400 110 TH	400	350	25	45	110	145	50	210	135	340	600	5000
R PGV 500 110 TH	500	450	25	45	110	100	20	170	135	340	450	3500
PGV 500 110 TH	500	450	25	45	110	145	50	210	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

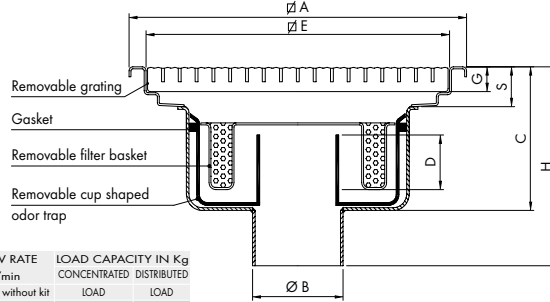

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Gullies with grating and horizontal outlet, removable Total Hygienic cup shaped odor trap and filter basket.




Dwg. No. 0411


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
R-low profile												
R PGO 200 75 TH	200	170	25	30	75	95	20	185	60	160	850	6500
PGO 200 75 TH	200	170	25	30	75	135	50	225	60	160	850	6500
R PGO 200 110 TH	200	170	25	30	110	95	20	220	60	240	850	6500
PGO 200 110 TH	200	170	25	30	110	135	50	260	60	240	850	6500
R PGO 300 75 TH	300	250	25	45	75	100	20	190	80	180	850	6500
PGO 300 75 TH	300	250	25	45	75	145	50	235	80	180	850	6500
R PGO 300 110 TH	300	250	25	45	110	100	20	225	135	340	850	6500
PGO 300 110 TH	300	250	25	45	110	145	50	270	135	340	850	6500
R PGO 400 110 TH	400	350	25	45	110	100	20	225	135	340	600	5000
PGO 400 110 TH	400	350	25	45	110	145	50	270	135	340	600	5000
R PGO 500 110 TH	500	350	25	45	110	100	20	225	135	340	450	3500
PGO 500 110 TH	500	350	25	45	110	145	50	270	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

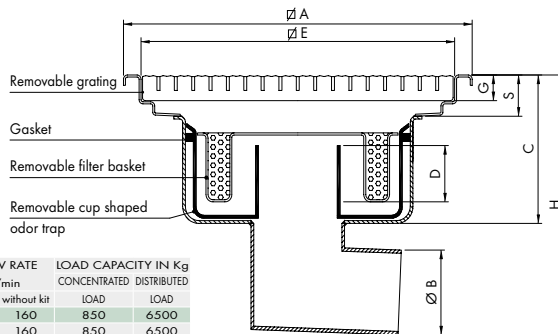

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



Ultra-low profile gullies with grating with horizontal outlet, removable TotalHygienic cup shaped odor trap.




Dwg. No. 0409


Article	DIMENSIONS IN mm								FLOW RATE		LOAD CAPACITY IN Kg	
	Ø A	Ø E	G	S	Ø B*	C	D	H	with Kit	without kit	CONCENTRATED	DISTRIBUTED
UR PGO 200 50 TH	200	170	25	30	50	85	20	135	50	80	850	6500
UR PGO 200 63 TH	200	170	25	30	63	72	20	135	60	120	850	6500
UR PGO 200 75 TH	200	170	25	30	75	70	50	145	60	160	850	6500
UR PGO 200 110 TH	200	170	25	30	110	65	50	175	60	240	850	6500
UR PGO 300 50 TH	300	250	25	45	50	100	20	150	50	100	850	6500
UR PGO 300 63 TH	300	250	25	45	63	87	20	150	60	140	850	6500
UR PGO 300 75 TH	300	250	25	45	75	85	50	160	80	180	850	6500
UR PGO 300 110 TH	300	250	25	45	110	80	50	190	135	340	850	6500
UR PGO 400 110 TH	400	450	25	45	110	80	50	190	135	340	600	5000
UR PGO 500 110 TH	500	450	25	45	110	80	50	190	135	340	450	3500

* Different diameters on request.

N.B. water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1

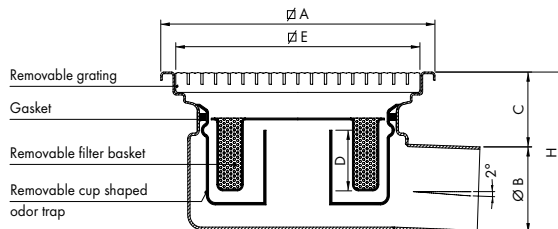

Total Hygienic Multislot grating without banding bar
ANTIBACTERIAL + ANTI-SLIP



The removable cup shaped odor trap makes it possible to empty the wastewater out of the floor drain.
It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.

