

### Inoxsystem® Total Hygienic GRATINGS - ROBUSTNESS, SAFETY AND HYGIENE

#### LOAD CLASS




#### CERTIFIED

#### IDEAL FOR FOOD PROCESSING FACILITIES, CIVIL AND INDUSTRIAL USE

Inoxsystem® Total Hygienic Multi-Slot and Double Slot gratings are ideal for professional kitchens, meat factories, dairies, oil mills, wineries, breweries, mineral water plants, bakeries, ice cream parlors, pharmaceutical plants and industrial facilities. Their frameless design along with rounded internal corners

of the channel ensure the highest standards of hygiene preventing dirt from accumulating on the channel edge and eliminating bacteria growth. Thanks to their notched surface these gratings meet anti-slip standard requirements.

Certifications: Inoxsystem® Total Hygienic channel with Multi-Slot or Double Slot grating and reinforced edges (art. TH+BCR) is third party certified to 400 Kn loading - D400 load class in accordance with UNI en 1433 Standard.

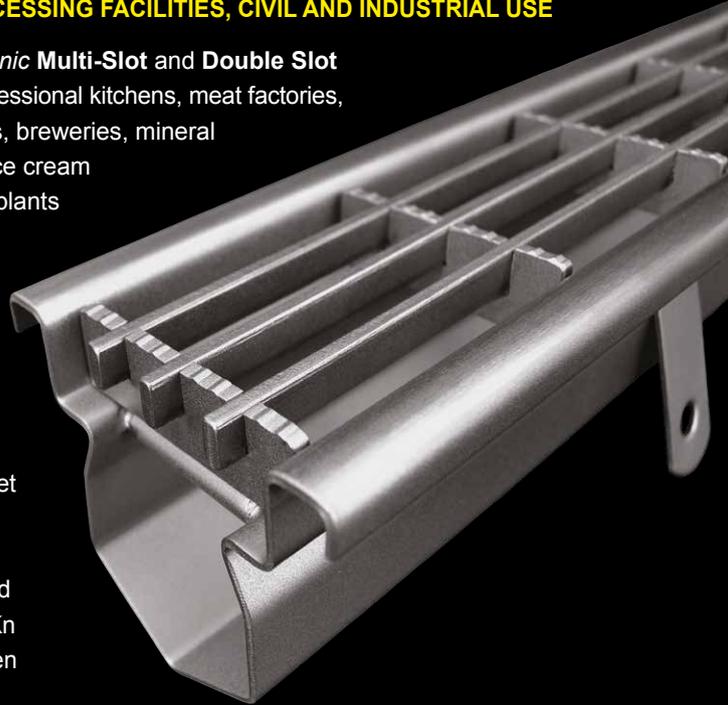

#### MULTISLOT

Total Hygienic MULTI-SLOT grating without banding bar, Mesh 13x80 mm h 20 mm  
ANTISEPTIC - ANTISLIP  
FOR HEAVY WEIGHT LOADS  
LOAD CLASS D400

Dwg. No. 0871



Width C	Length D	Mesh BxA	Bearing bar HxS	Cross bar H1xS1
65	1000 (max)	13x80	20x4	10x4

Article  
G0871

Total Hygienic MULTI-SLOT grating without banding bar, Mesh 13x160 mm h 20 mm  
ANTISEPTIC - ANTISLIP  
FOR MEDIUM WEIGHT LOADS  
LOAD CLASS C250

Dwg. No. 0872



Width C	Length D	Mesh BxA	Bearing bar HxS	Cross bar H1xS1
65	1000 (max)	13x160	20x4	10x4

Article  
G0872



Dwg. No. 0871

\* Our #Total Hygienic channels are supplied with multi-slot grating 0871 as standard

#### DOUBLE SLOT

Channel 5001 with grating G0873



Total Hygienic CLOSED GRATING WITH TWO SIDE SLOTS OF 12 mm, h 20 mm  
ANTISEPTIC - ANTISLIP  
FOR HEAVY WEIGHT LOADS  
LOAD CLASS D400

Dwg. No. 0873



Width C	Length D	Slots (C-B)/2	Mesh A	Bearing bar HxS	Upper plate BxH1
65	1000 (max)	12	160	20x4	40x8

Article  
G0873



Dwg. No. 0873

\* Double slot grating 0873 available on request

