


made of grade 304 stainless steel - grade 316 on request

Floor drains with square top plate and vertical outlet, with one floor drain-channel connection  
removable Total Hygienic internal odor trap pipe and filter basket.

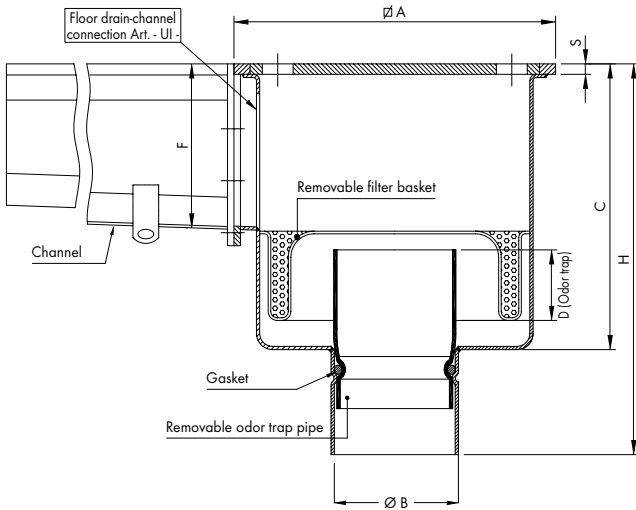


Dwg. No. 0110

Article	DIMENSIONS IN mm							FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B	F (max)	C	D	H	with Kit	without kit	CONCENTRATED LOAD
R CV 75 206 E	200	6	75*	95	150	20	220	60	160	1000	10000
CV 75 206 E	200	6	75*	130	220	50	290	60	160	1000	10000
R CV 75 308 E	300	8	75*	95	150	20	220	80	180	1000	10000
CV 75 308 E	300	8	75*	130	220	50	290	80	180	1000	10000
R CV 110 308 E	300	8	110*	95	150	20	250	135	340	1000	10000
CV 110 308 E	300	8	110*	130	220	50	320	135	340	1000	10000

\* Outlet Ø 63 mm available on request.  
N.B.: Heights valid for channels with maximum length 12 m  
N.B.: water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



Floor drains with square top plate and horizontal outlet, with one floor drain-channel connection  
removable Total Hygienic internal odor trap pipe and filter basket.

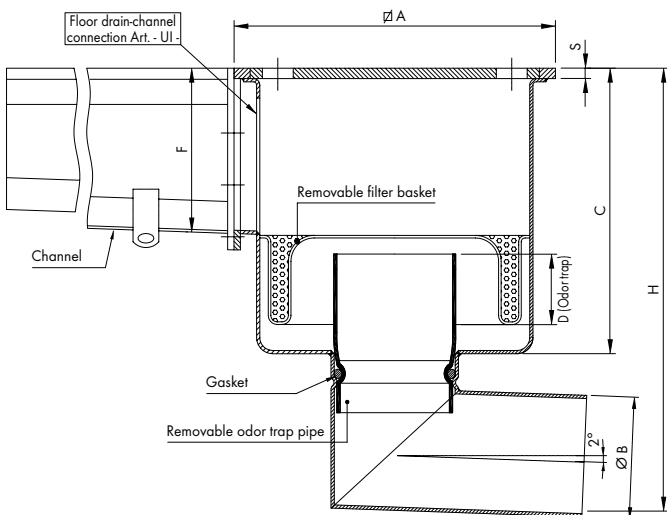

Dwg. No. 0005

Article	DIMENSIONS IN mm							FLOW RATE		LOAD CAPACITY IN Kg	
	R=low profile	Ø A	S	Ø B	F (max)	C	D	H	with Kit	without kit	CONCENTRATED LOAD
R CL 75 206 E	200	6	75*	95	150	20	260	60	160	1000	10000
CL 75 206 E	200	6	75*	130	220	50	330	60	160	1000	10000
R CL 75 308 E	300	8	75*	95	150	20	260	80	180	1000	10000
CL 75 308 E	300	8	75*	130	220	50	330	80	180	1000	10000
R CL 110 308 E	300	8	110*	95	150	20	305	135	340	1000	10000
CL 110 308 E	300	8	110*	130	220	50	375	135	340	1000	10000

\* Outlet Ø 63 mm available on request.  
N.B.: Heights valid for channels with maximum length 12 m  
N.B.: water seal depth (dimension D) of 50 mm in compliance with standard UNI EN 1253-1



By removing both filter basket and internal odor trap pipe the wastewater flows and the floor drain should be thoroughly cleaned. It is highly recommended to fill the floor drain with water after cleaning in order to stop smells from coming back up.